


Topakustik Classic



29/3 M

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions

formerly: TOPAKUSTIK 29/3 M

These grooves are the ideal solution for standard absorption requirements. As with all centre-to-centre distances, the wide grooving also comes with 2 mm, 3 mm and 4 mm grooves.

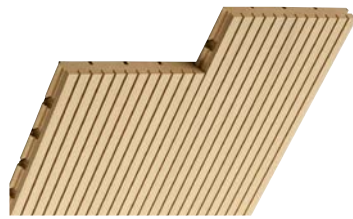

Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten or clamping to a H/T-bar with turning-clips.

Normally flammable D-s2,d0 / CH RF 3



| | | |
|------------|------------|------------|
| 2780 × 128 | 2780 × 128 | 2780 × 128 |
| 3640 × 128 | | |
| 4080 × 128 | 4080 × 128 | |

Flame retardant B-s1,d0 / CH RF 2



| | | |
|------------|------------|------------|
| 2780 × 128 | 2780 × 128 | 2780 × 128 |
| 3640 × 128 | | |
| 4080 × 128 | 4080 × 128 | |

RESAP® core panel, non-combustible




| | |
|------------|------------|
| 2540 × 128 | 2540 × 128 |
| 3080 × 128 | 3080 × 128 |

Custom lengths are also available

29/3 M-6%

| αw | Euro | NRC |
|---------|------|------|
| 0.65 L | C | 0.73 |
| 0.60 LM | C | 0.76 |



Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

Normally flammable D-s2,d0 / CH RF 3



| | | |
|-------------|-------------|-------------|
| 4080 × 1216 | 3640 × 1216 | 4080 × 1216 |
|-------------|-------------|-------------|

Flame retardant B-s1,d0 / CH RF 2



| | | |
|-------------|-------------|-------------|
| 4080 × 1216 | 3640 × 1216 | 4080 × 1216 |
|-------------|-------------|-------------|

RESAP® core panel, non-combustible



| | |
|-------------|-------------|
| 3080 × 1216 | 3080 × 1216 |
|-------------|-------------|

ideal = means optimal use of MDF core – custom lengths are also available

| | | |
|--------------------|--------------------|--------------------|
| 2040 × 992/ 640 | 2040 × 992/ 640 | 2040 × 992/ 640 |
| 2780 × 992/ 640 | 2780 × 992/ 640 | 2780 × 992/ 640 |
| 3640 × 640 | 3640 × 640 | |

| | | |
|--------------------|--------------------|--------------------|
| 2040 × 992/ 640 | 2040 × 992/ 640 | 2040 × 992/ 640 |
| 2780 × 992/ 640 | 2780 × 992/ 640 | 2780 × 992/ 640 |
| 3640 × 640 | | |

| | |
|------------|------------|
| 1540 × 608 | 1540 × 608 |
| 2540 × 608 | 2540 × 608 |
| 3080 × 608 | 3080 × 608 |

Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)