

Topakustik Custom Line 2111

formerly: TOPAKUSTIK LINE 2111

A completely new concept through ornamental designs instead of perforations or grooving. Virtually limitless individualisation thanks to almost any design on nearly any surface.

Core materials

- MDF 16 mm normally flammable D-s2,d0 and flame retardant B-s1,d0
- RESAP®-Plus 17 mm, non-combustible
- Three-layer panel ARIA-Pure (white fir) 16 mm

Formats

- MDF max. 4000 × 1280 mm
- RESAP®-Plus max. 3050 × 1220 mm
- Three-layer panel ARIA-Pure max. 4000 × 1280 mm

The external dimensions depend on the pattern. Note the axial dimensions of the pattern horizontally and vertically, which are assigned to each of the different designs.

Surface finishes

Paint

All except white and very light colours (after consultation)

Real wood veneer


All types of wood (light veneers must be sampled)

eco Melamine coating

Our eco collection 2.0 (only with MDF), HPL coating on request

Custom Line

2111

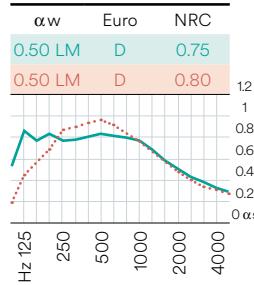

Sound absorption data acc. to ISO 354


Suspension height:

- approx. 226 mm
- approx. 66 mm

with acoustic fleece and Mineral wool 40 mm (60 kg/m³)


TOP | A | K | U | S | T | I | K | +

Acoustic panel solutions

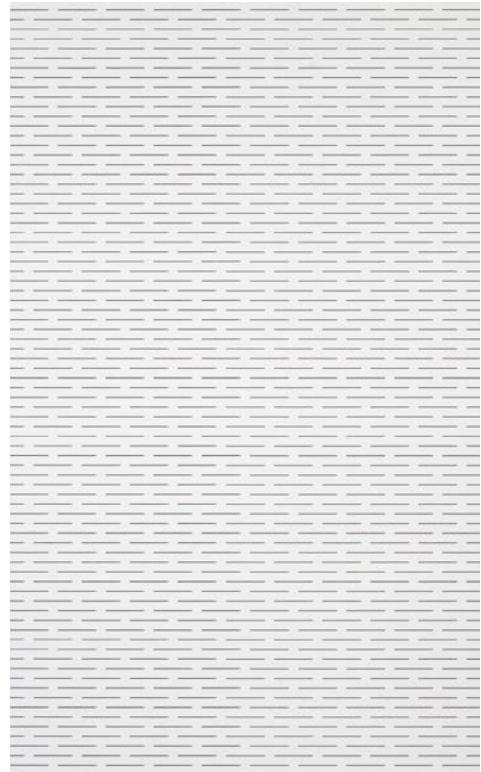

Topakustik Custom Line Plus with increased sound absorption value

After consultation with Topakustik, an additional micro-perforation can be added over the entire surface. This improves the sound absorption value.

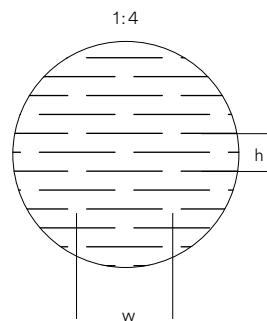

Pattern w = 50 mm
 h = 20 mm