


Topakustik Classic

13/3 M or T



formerly: TOPAKUSTIK 13/3 M or T

The most popular Topakustik types. High sound absorption combined with easy assembly. The grooving remains visible even from a long distance.

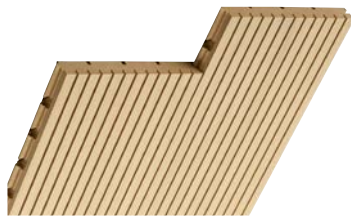

Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten or clamping to a H/T-bar with turning-clips.

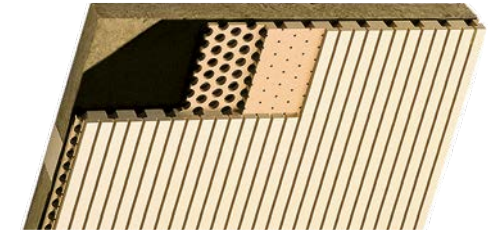

Normally flammable D-s2,d0 / CH RF 3



2780 × 128	2780 × 128	2780 × 128
3640 × 128		
4080 × 128	4080 × 128	

Flame retardant B-s1,d0 / CH RF 2



Standard		
2780 × 128	2780 × 128	2780 × 128
3640 × 128		
4080 × 128	4080 × 128	

RESAP® core panel, non-combustible



2540 × 128	2540 × 128
3080 × 128	3080 × 128

Custom lengths are also available



Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

Normally flammable D-s2,d0 / CH RF 3



maximal		
4080 × 1216	3640 × 1216	4080 × 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640
2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640
3640 × 640	3640 × 640	

Flame retardant B-s1,d0 / CH RF 2



maximal		
4080 × 1216	3640 × 1216	4080 × 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640
2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640
3640 × 640		

RESAP® core panel, non-combustible




1540 × 608	1540 × 608
2540 × 608	2540 × 608
3080 × 608	3080 × 608

TOP(A)K(U)S(T)I(K)

Acoustic panel solutions


13/3 M-12%

αw	Euro	NRC
0.90	A	0.89
0.85	B	0.85




13/3 M-6%

αw	Euro	NRC
0.65 L	C	0.71
0.60 LM	C	0.76



13/3 T

αw	Euro	NRC
0.35 LM	D	0.57
0.35 LM	D	0.62



Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)