


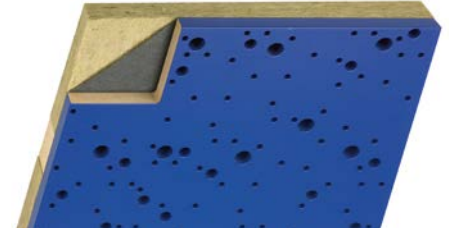
# Topakustik Custom Bubble

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions

formerly: TOPPERFO-Bubble


Topakustik Custom Bubble, that is three different drill diameters, which we now offer in two different open areas (2.0 and 3.0).



## Formats

Acc. to sketches below, other formats on request.

Panel dimensions are dependant on the repeated design in horizontal and vertical direction.

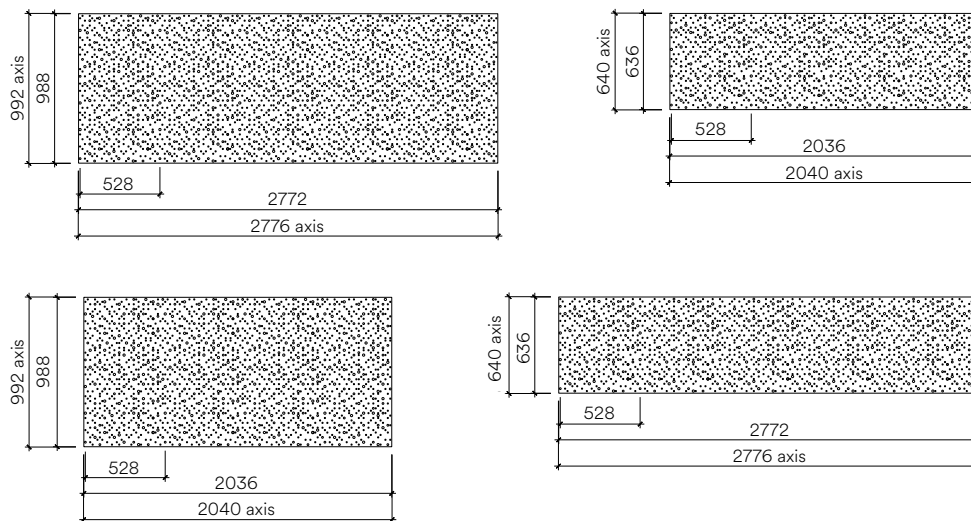


### Bubble 2.0-7%

| $\alpha_w$ | Euro | NRC  |
|------------|------|------|
| 0.50 L     | D    | 0.50 |
| 0.50       | D    | 0.51 |

### Bubble 3.0-12.5%

| $\alpha_w$ | Euro | NRC  |
|------------|------|------|
| 0.65       | C    | 0.64 |
| 0.70       | C    | 0.64 |

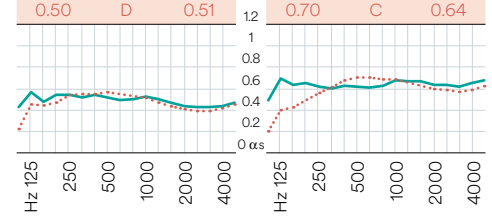

### Sound absorption data acc. to ISO 354

#### Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m<sup>3</sup>)

## Core Material

MDF 16 mm normally flammable D-s2,d0 and fire retardant B-s1,d0

## Surfaces



### Paint

all colours acc. to RAL/NCS  
(holes remain brown)



### Real wood veneer

all types of wood veneer  
Stained surfaces on request



### Melamine

Our eco collection 2.0  
(only with MDF)  
HPL coating on request